

GEBRAUCHSANLEITUNG INSTRUCTIONS FOR USE

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0



SETOLITE Lichttechnik GmbH

Bockhackerstr. 13 - 42499 Hückeswagen, Germany

☎ +49 2192 93624-0 - 📠 +49 2192 93624-25

info@setolite.de - www.setolite.com

Inhalt

Gültigkeit der Gebrauchsanleitung	2
Vor Gebrauch	2
Symbole in der Gebrauchsanleitung	2
Gewährleistung	3
Sicherheitshinweise	3
Anwendungsbereich	3
Bedienelemente	4
Vor Inbetriebnahme	5
Akkuladung	5
Ladeschale	5
Inbetriebnahme	5
Betrieb / Lichtfunktionen	5 – 6
Notlichtfunktion	6
Reinigung und Pflege	6
Wartung	6
Entsorgung	7
Entsorgung Akku	7
Rücknahme von Altgeräten	7
Technische Daten	7
Optionales Zubehör	8

Gültigkeit der Gebrauchsanleitung

Diese Gebrauchsanleitung ist gültig für Leuchten der Serie **SETO FLASHLIGHT FC LED RECHARGEABLE 2.0**. Typenbezeichnung und Artikelnummer entnehmen Sie bitte dem Typenschild.

WICHTIG

VOR GEBRAUCH SORGFÄLTIG LESEN UND AUFBEWAHREN FÜR SPÄTERES NACHSCHLAGEN

- Das Nichtbeachten dieser Gebrauchsanleitung kann zu Verletzungen oder Beschädigungen führen.
- Wenn Sie das Gerät anderen Personen zur Nutzung überlassen, übergeben Sie auch diese Gebrauchsanleitung.

Symbole in der Gebrauchsanleitung

GEFAHR!

Macht auf gefährliche Situationen durch elektrischen Strom aufmerksam. Bei Nichtbeachtung besteht die Gefahr einer Verletzung oder Lebensgefahr.

WARNUNG!

Kennzeichnet Sicherheitshinweise, bei deren Nichtbeachtung die Gefahr einer Verletzung oder Lebensgefahr besteht.

VORSICHT!

Kennzeichnet Gefahren, die Beschädigungen des Gerätes zur Folge haben können.

HINWEIS!

Hebt Tipps und andere nützliche Informationen dieser Gebrauchsanleitung hervor.

Gewährleistung

Hinsichtlich Gewährleistung und Garantieregelungen gelten die zum Zeitpunkt des Kaufs gültigen AGB.

Bitte beachten Sie auch unsere aktuellen Seiten im Internet unter www.setolite.com

Sicherheitshinweise

Dieses Qualitätsprodukt ist nach aktuellen technischen Standards gefertigt, geprüft und in einem sicherheitstechnisch einwandfreien Zustand ausgeliefert worden. Um diesen Zustand zu erhalten und einen gefahrlosen Betrieb sicherzustellen, muss der Anwender die Hinweise und Warnvermerke dieser Gebrauchsanleitung beachten.



Es ist anzunehmen, dass ein gefahrloser Betrieb nicht mehr möglich ist,

- wenn die Leuchte sichtbare Schäden aufweist.
- wenn die Leuchte nicht mehr ordnungsgemäß arbeitet.
- nach längerer Lagerung unter ungünstigen Verhältnissen.
- nach schweren Transportbeanspruchungen.

In diesen Fällen ist die Leuchte zur Reparatur zu geben.



HINWEIS!

Eine Reparatur der Leuchte darf nur durch den Hersteller, seinen Kundendienst oder eine Elektrofachkraft erfolgen. Elektrofachkraft ist, wer aufgrund seiner fachlichen Ausbildung, Kenntnisse und Erfahrungen sowie Kenntnisse der einschlägigen Normen, die übertragenen Arbeiten beurteilen und mögliche Gefahren erkennen kann. Garantiereparaturen werden nur durch den Hersteller ausgeführt.



Sicherheitshinweise zu Leuchten mit Akku

Vorsichtsmaßnahmen für die Langzeitlagerung


- Vor längerer Lagerung sorgen Sie bitte für einen vollständig geladenen Akku.
- Bitte beachten Sie, dass bei einer Lagerung unter 10 °C die Lebensdauer des Akkus beeinträchtigt sein kann.
- Bitte an einem trockenen Ort aufbewahren.

Anwendungsbereich

SETO Leuchten sind als Beleuchtung für Industrie, Handwerk, Werkstätten, Rettungsdienste, Energieversorger, Bahn- und Verkehrsbetriebe usw. einsetzbar. **SETO** Leuchten sind konzipiert, um Ihnen eine optimale Beleuchtung direkt am Arbeitsplatz bereitzustellen.

Ein Betrieb in korrosiver oder explosionsgefährdeter Umgebung ist nicht zulässig.

Bedienelemente

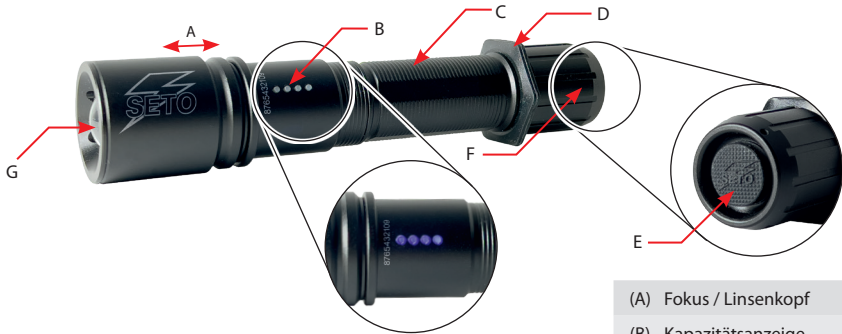

- (A) Fokus / Linsenkopf
- (B) Kapazitätsanzeige
- (C) Li-Ionen-Akku
- (D) Wegrollschutzring
- (E) Schalter EIN / AUS
- (F) Verschlusskappe
- (G) Linse
- (H) Ladekontakte
- (I) Ladeschale
- (J) USB-C-Ladebuchse
- (K) USB-C-Ladekabel

[a] Ladeschale mit USB-C-Ladekabel



[b] USB-C-Ladekabel mit **USB-Netz-/ Kfz-Adapter**



[c] Gürtelclip / Holster



Vor Inbetriebnahme

HINWEIS!

Für Leuchten mit Akku

Der Akku ist bei Auslieferung teilgeladen. Vor Verwendung ist der Akku ausschließlich im verbauten Zustand mithilfe der Leuchte, der mitgelieferten Ladeschale (I), des USB-C-Ladekabels sowie dem geeigneten Ladestecker aufzuladen, damit Ihnen die volle Leuchtdauer zur Verfügung steht.

Akkuladung

Laden Sie den Leuchtenakku (C) ausschließlich mithilfe der im Lieferumfang enthaltenen Ladeschale (I) und des USB-C-Ladekabels (K). Dazu wird die Leuchte mit den Ladekontakten (H) nach unten zeigend auf die Ladeschale (I) gelegt und festgesteckt. Sie erkennen den richtigen Sitz an einem metallischen Klick-Geräusch. Verbinden Sie das USB-C-Ladekabel (K) mit dem USB-C-Ladebuchse (J) an der Seite der Ladeschale (I) und verbinden Sie das USB-C-Ladekabel (K) mit dem mitgelieferten USB-Netz-Adapter oder USB-Kfz-Adapter (bei der Ladung im Fahrzeug).

Hinweis: Während der Ladung ist ein Betrieb der Leuchte möglich.

Statusanzeige

Während des Ladevorgangs blinkt der jeweilige Ladezustandspunkt der Kapazitätsanzeige. Bei vollständiger Aufladung leuchten alle Ladezustandspunkte konstant.

WARNUNG!

Die Ladung ist nur in trockenen Räumen durchzuführen.

Ladeschale

Durch die Verwendung des mitgelieferten Velcro-Systems (Klettband) ist keine Verschraubung im Fahrzeug notwendig.


Inbetriebnahme

1. Vor dem Einlegen des Akkus (C) muss die Leuchte ausgeschaltet sein.
2. Schrauben Sie die Verschlusskappe (F) entgegen dem Uhrzeigersinn auf und legen Sie den Akku (C) mit dem Plus-Pol voran (Seite mit Vertiefung) in die Leuchte ein. Setzen Sie die Verschlusskappe (F) wieder ins Leuchtengehäuse und schrauben Sie die Leuchte fest zu.

Achtung: Die Leuchte funktioniert nicht, wenn der Akku (C) falsch eingelegt ist.

3. Zum Ein- und Ausschalten drücken Sie den Ein-/ Aus-Schalter (E).
4. Halten Sie den Leuchtenkörper fest und schieben den Linsenkopf (A) vor und zurück, um den gewünschten Lichtkegel einzustellen (siehe Zeichnung rechts).
5. Mehrfachfunktion:

Einfaches Drücken des Schalters (E) schaltet die verschiedenen Lichtmodi in der Reihenfolge 100 % – 50 % – AUS durch. Ein langes Drücken schaltet die Leuchte in jedem Leuchtzustand aus.



Betrieb / Lichtfunktionen

Sobald der Ladezustand des Leuchtenakkus auf dem niedrigsten Stand ist, schaltet sich die Leuchte automatisch aus. Die Leuchte muss dann mithilfe der Ladeschale aufgeladen werden (siehe Punkt „Akkuladung“).



VORSICHT!

- Blendgefahr! Niemandem in die Augen leuchten und schauen Sie nicht direkt ins Licht. Dies kann zu vorübergehenden oder auch permanenten Augenschädigungen führen (Gefahr einer Netzhautverletzung).
- Produkt nicht für Augenuntersuchungen verwenden (Pupillentest). Erhöhte Blendgefahr.
- Halten Sie die Leuchte von Kindern fern. Dies ist kein Spielzeug.
- Das Außengehäuse der Leuchte kann bei intensivem Gebrauch warm werden. Das ist normal.
- Verwenden Sie die Leuchte nicht in der Nähe von hohen Temperaturen wie Feuer oder Heizgeräten. Dies kann zu einer Explosion oder Entzündung führen.
- Nicht verwenden, wenn der Betriebstemperaturbereich (-10 bis +40 °C) unter- bzw. überschritten wird.
- **Der Akku darf ausschließlich mit einem geeigneten Ladegerät verwendet werden.**

Lichtfunktionen:

Hauptlicht

Durch Betätigung des Schalters EIN / AUS (E) wird das Hauptlicht ein- oder ausgeschaltet bzw. die verschiedenen Lichtfunktionen aktiviert:

1 x drücken:	Hauptlicht (weiß)	-	EIN / 100 %
2 x drücken:	Hauptlicht (weiß)	-	ca. 50 %
3 x drücken:	Hauptlicht (weiß)	-	AUS



Kapazitätsanzeige

Beim Einschalten der Leuchte wird die Kapazitätsanzeige (B) aktiviert. Mittels der Anzeige auf der Oberseite der Leuchte wird Ihnen der aktuelle Ladestand des Akkus angezeigt.

	100 %
	75 %
	50 %
	25 %



Notlichtfunktion

Die **SETO FLASHLIGHT FC LED RECHARGEABLE 2.0** verfügt über eine Notlichtfunktion, die sich ausschließlich nur dann einschaltet, wenn die Stromzufuhr während des Ladevorgangs auf der Ladeschale unterbrochen wird. Zur Aktivierung bzw. Deaktivierung der Notlichtfunktion muss die Leuchte ausgeschaltet sein. Dazu den Schalter EIN / AUS (E) drei Sekunden gedrückt halten. Zur Bestätigung blinkt die Leuchte für fünf Sekunden auf. Das Ausschalten der Funktion erfolgt wie das Einschalten: Den Schalter EIN / AUS (E) drei Sekunden gedrückt halten, zur Bestätigung blinkt die Leuchte drei Sekunden.

Reinigung und Pflege

Verwenden Sie zum Reinigen der Kunststoffteile / Metallteile keine Lösungsmittel, Alkohole oder sonstige Chemikalien. Verwenden Sie zum Entfernen von Schmutz, Staub, Öl und Fett usw. ein weiches, trockenes und fusselfreies Tuch.

Wartung

Die Leuchte **SETO FLASHLIGHT FC LED RECHARGEABLE 2.0** wurde als wartungsfrei konzipiert. Es sind daher keine Wartungsarbeiten notwendig.

Entsorgung



Dieses Produkt darf am Ende seiner Lebensdauer nicht über den normalen Haushaltsabfall entsorgt werden, sondern muss an einem Sammelpunkt für das Recycling von elektrischen und elektronischen Geräten abgegeben werden. Das Symbol auf dem Produkt, der Gebrauchsanleitung oder der Verpackung weist darauf hin.

Die Werkstoffe sind gemäß ihrer Kennzeichnung wiederverwertbar. Mit der Wiederverwendung, der stofflichen Verwertung oder anderen Formen der Verwertung von Altgeräten leisten Sie einen wichtigen Beitrag zum Schutze unserer Umwelt. Bitte erfragen Sie bei der Gemeindeverwaltung die zuständige Entsorgungsstelle.

Entsorgung Akku



Bitte achten Sie auf eine ordnungsgemäße Entsorgung des Akkus. Entsorgen Sie diese niemals mit dem Hausmüll. Akkus sind im entladenen Zustand bei einer Recyclingstelle abzugeben. Vorher sind Maßnahmen gegen Kurzschluss zu treffen (z. B. das Abkleben der Kontakte mit geeigneten Klebestreifen). Beachten Sie stets die jeweils gültigen Gesetze und Verordnungen zur Entsorgung von Akkus.

Rücknahme von Altgeräten

Wir kümmern uns um eine umweltverträgliche Entsorgung Ihrer Altgeräte. Wenden Sie sich direkt an Ihr SETOLITE Team!

Technische Daten

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0	
Elektrische Daten	
Akku	1 x 18650 Li-Ionen-Akku, 3.350 mA, 3,7 V
Betriebsdauer	100 % = 12 h 50 % = 22 h
Ladezeit	ca. 4 h mit dem mitgelieferten USB-Netz-Adapter
Lichtmodi	Verschiedene Lichtfunktionen (100 % / 50 % / Notlicht)
Lichttechnische Daten	
Leuchtmittel	CREE-XPG 3
Lichtstrom (REAL Lumen*)	ca. 450 lm (100 %), ca. 230 lm (50 %)
Allgemeine Daten	
Schutzart	IPX4
Abmessung (Ø x H)	34 x 163 mm
Gewicht	142 g (Leuchte), 48 g (Akku)
Art.-Nr.	78_0G622C

* Lumen = lm / Bei den „REAL Lumen“ handelt es sich um REAL gemessene Lichtaustrittsmengen.

Lieferumfang:

Leuchte, Li-Ionen-Akku, Ladeschale, USB-C-Ladekabel (1 m), USB-Netz-Adapter und USB-Kfz-Adapter, Velcro-Klebeband (Klettband), abnehmbarer und flexibel geformter Gürtelclip / Holster

Optionales Zubehör

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – ERSATZAKKU

Li-Ionen-Akku + LN 18650 / 3.350 mAh / 3,7 V / 12,39 Wh

Art.-Nr.: 78__0G622C-A

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – LADESCHALE

Ladeschale mit USB-C-Eingang

Art.-Nr.: 78__0G622C-C

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – GÜRTELCLIP / HOLSTER

Zum Tragen am Gürtel

Art.-Nr.: 78__0G622C-H

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – USB-KFZ-ADAPTER

USB-Kfz-Adapter / Eingang DC 12 – 24 V / Ausgang DC 5 V / 2,1 A

Art.-Nr.: 78__0G622C-K

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – USB-NETZ-ADAPTER

USB-Netz-Adapter (AC/DC) / Eingang 100 – 240 V ~ 50/60 Hz, 0,4 A / Ausgang DC 5 V / 2,1 A

Art.-Nr.: 78__0G622C-N

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – USB-C-LADEKABEL

Kabellänge: 1 m

Art.-Nr.: 78__0G622C-U

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – VELCRO-KLEBEPAD

5 x 6 cm, bestehend aus je 1 x Haken und Flausch

Art.-Nr.: 78__0G622C-V

Zur optimalen Nutzung der Leuchte sollte nur das mitgelieferte Zubehör verwendet werden.

Table of contents

Validity of instructions for use	9
Before use	9
Symbols in the instructions for use	9
Warranty	10
Safety information	10
Field of application	10
Controls	11
Before initial operation	12
Charging battery rechargeable	12
Charging cradle	12
Initial operation	12
Operation / light functions	13
Emergency light function	13
Cleaning and care	13
Maintenance	13
Disposal	14
Disposal of rechargeable battery	14
Return of old equipment	14
Technical data	14
Optional accessories	15

Validity of instructions for use

These instructions for use are valid for luminaires of the series **SETO FLASHLIGHT FC LED RECHARGEABLE 2.0**. Please refer to the rating plate for the type designation and article number.

IMPORTANT **READ CAREFULLY BEFORE USE AND KEEP FOR LATER REFERENCE**

- Neglecting these instructions may lead to injuries or damages.
- When leaving the device for other persons to use, hand over the instructions as well.

Symbols in the instructions for use

DANGER!

Calls attention to dangerous situations with electrical current. When neglected, there is a danger of injuries or danger of life.

WARNING!

Labels safety guidelines which can cause dangers of injuries or dangers of life when neglected.

ATTENTION!

Labels dangers that may lead to damages of the product.

INFORMATION!

Highlights tips and other useful information of these instructions for use.

Warranty

With regard to warranty and guarantee regulations, the terms and conditions valid at the time of purchase apply.

Please refer to our latest sites at www.setolite.com

Safety information

This quality luminaire was built according to the rules of technology. The luminaire was built, tested and delivered in proper condition. To maintain this condition and to ensure safe operation, the user must follow the instructions and warnings of the instructions for use.



It is to assume that a safe operation is not possible

- if the luminaire shows visible damage.
- if the luminaire is no longer working properly.
- after prolonged storage under unfavourable conditions.
- after heavy transport stresses.

In these cases, the luminaire must be sent in for repair.



INFORMATION!

Repairs to the luminaire must be carried out only by the manufacturer, his customer service department or a qualified electrician. A qualified electrician has the professional training, knowledge and experience, as well as knowledge of the pertinent standards, to assess the assigned work and recognize possible hazards. Warranty repairs are carried out by the manufacturer only.



Safety instructions for luminaires with rechargeable batteries

Precautions for long-term storage


- Before prolonged storage, please ensure that the rechargeable battery is fully charged.
- Please note that if stored below 10 °C, the rechargeable battery life may be affected.
- Please store in a dry place.

Field of application

SETO luminaires are applicable as lighting for industry, crafts, workshops, rescue services, energy suppliers, railway and transportation companies etc. **SETO** luminaires are developed to offer you optimal illumination directly at the workplace.

Operation in a corrosive or potentially explosive environment is not permitted.

Controls

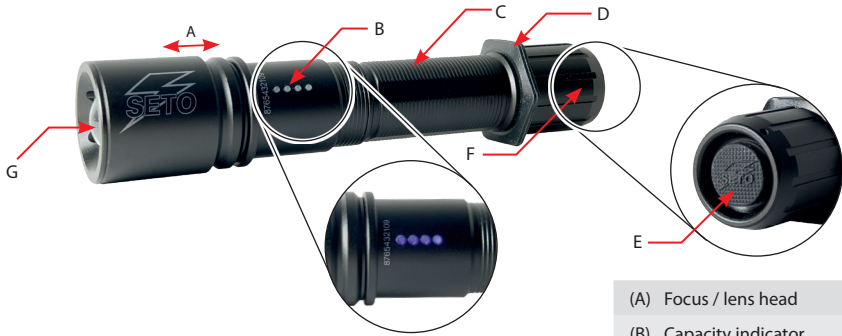

- (A) Focus / lens head
- (B) Capacity indicator
- (C) Li-ion rechargeable battery
- (D) Anti-roll ring
- (E) ON / OFF switch
- (F) Closing cap
- (G) Lens
- (H) Charging contacts
- (I) Charging cradle
- (J) USB-C charging port
- (K) USB-C charging cable

[a] Charging cradle with USB-C charging cable



[b] USB-C charging cable **with USB mains / car adapter**



[c] Belt clip / holster



Before initial operation

INFORMATION!

For luminaires with rechargeable battery

The rechargeable battery is partially charged when delivered. Before use, the rechargeable battery must only be charged in the installed state using the luminaire, the supplied charging cradle (I), the USB-C charging cable and the suitable charging plug so that you have the full lighting duration.

Charging rechargeable battery

Only charge the rechargeable battery (C) using the charging cradle (I) and USB-C charging cable (K) included in the scope of delivery. To do this, place the luminaire on the charging cradle (I) with the charging contacts (H) facing downwards and plug it in. You can recognize the correct fit by the metallic clicking sound. Connect the USB-C charging cable (K) to the USB-C charging port (J) on the side of the charging cradle (I) and connect the USB-C charging cable (K) to the supplied USB mains adapter or USB car adapter (when charging in the vehicle).

Note: The luminaire can be operated during charging.

Status display

During the charging process, the respective charge status point of the capacity indicator flashes. When fully charged, all charge status points light up constantly.

WARNING!

Charging must only be carried out in dry rooms.

Charging cradle


The charging cradle can either be placed on a flat surface, e.g. a table-top, or attached to a wall by screwing or sticking it on. Thanks to the Velcro system supplied, no screws are required in the vehicle.

Initial operation

1. The luminaire must be switched off before inserting the rechargeable battery (C).
2. Unscrew the closing cap (F) anti-clockwise and insert the rechargeable battery (C) into the luminaire with the positive pole first (side with indentation). Replace the closing cap (F) in the light housing and screw the luminaire back on tightly.

Caution: The light will not work if the rechargeable battery is inserted incorrectly.

3. To switch on and off, press the ON/OFF switch (E).
4. Hold the luminaire body firmly and slide the lens head (A) forwards and backwards to set the desired light cone (see drawing on the right).
5. Multiple function:
A single press of the switch (E) switches through the various light modes in the sequence 100 % – 50 % – OFF. A long press switches the luminaire off in each lighting mode.



Operation / light functions

As soon as the charge level of the luminaire rechargeable battery is at its lowest, the luminaire switches off automatically. The luminaire must then be recharged using the charging cradle (see "Charging the battery").

⚠ ATTENTION!

- Danger of glare! Do not shine in anyone's eyes and do not look directly into the light. This can lead to temporary or even permanent eye damage (risk of retinal injury).
- Do not use product for eye examinations (pupil test). Increased risk of glare.
- Keep the luminaire away from children. This is not a toy.
- The outer housing of the luminaire may become warm during intensive use. This is normal.
- Do not use the luminaire near high temperatures such as fire or heaters. This may cause an explosion or ignition.
- Do not use if the operating temperature range (-10 to +40 °C) drops below or is exceeded.
- **The rechargeable battery may only be used with a suitable charger.**

Light functions:

Main light

By pressing the ON/OFF switch (E) the main light is switched on or off or the various light functions are activated.

Press once: main light (white) – ON / 100 %

Press twice: main light (white) – approx. 50 %

Press three times: main light (white) – OFF



Capacity indicator

The capacity indicator (B) is activated when the luminaire is switched on. The display on the top of the luminaire shows you the current charging status of the rechargeable battery.

■	■	■	■	100 %
■	■	■	□	75 %
■	■	□	□	50 %
■	□	□	□	25 %



Emergency light function

The **SETO FLASHLIGHT FC LED RECHARGEABLE 2.0** has an emergency light function that only switches on if the power supply is interrupted during the charging process on the charging cradle. The luminaire must be switched off to activate or deactivate the emergency light function. To do this, press the ON / OFF switch (E) for three seconds. The luminaire goes on for five seconds to confirm. The function is switched off in the same way as it is switched on: Press and hold the ON / OFF switch (E) for three seconds, the luminaire flashes for three seconds to confirm.

Cleaning and care

Do not use any solvents, alcohol or other chemicals to clean the plastic parts / metal parts.

To remove dirt, dust, oil and grease, etc., use a soft, dry, lint-free cloth.

Maintenance

The **SETO FLASHLIGHT FC LED RECHARGEABLE 2.0** luminaire was designed to be maintenance-free. Therefore no maintenance work is necessary.

Disposal



At the end of its useful life, this product must not be disposed of with normal household waste, but must be taken to a collection point for the recycling of electrical and electronic equipment. The symbol on the product, the instructions for use or the packaging indicates this.

The materials are recyclable according to their labeling. By reusing, material recycling or other forms of recycling old devices, you are making an important contribution to protecting our environment. Please ask the municipal administration for the responsible disposal point.

Disposal of rechargeable battery



Please ensure that you dispose of the rechargeable battery properly. Never dispose of them with household waste. Discharged rechargeable batteries must be handed in at a recycling point. Measures must be taken beforehand to prevent short circuits (e.g. covering the contacts with suitable adhesive strips). Always observe the applicable laws and regulations for the disposal of rechargeable batteries.

Return of old equipment

We take care of the environmentally friendly disposal of your old devices. Contact your SETOLITE team directly!

Technical data

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0	
Electrical data	
Rechargeable battery	1 x 18650 Li-Ion rechargeable battery 3,350 mA, 3.7 V
Operating time	100 % = 12 h 50 % = 22 h
Charging time	approx. 4 h with the supplied USB mains adapter
Switching modes	Various light functions (100 % / 50 % / emergency light)
Luminous data	
Luminant	CREE-XPG 3
Luminous flux (REAL lumen*)	approx. 450 lm (100 %), approx. 230 lm (50 %)
General data	
Degree of protection	IPX4
Dimensions (Ø x H)	34 x 163 mm
Weight	142 g (luminaire), 48 g (rechargeable battery)
Item no.	78__0G622C

* Lumen = lm / The "REAL Lumen" are REAL measured light output quantities.

Scope of delivery:

Luminaire, Li-ion rechargeable battery, charging cradle, USB-C charging cable (1 m), USB mains adapter and USB car adapter, Velcro adhesive pad, removable and flexibly moulded belt clip / holster

Optional accessories

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – REPLACEMENT RECHARGEABLE BATTERY

Li-Ion rechargeable battery + LN 18650 / 3,350 mAh / 3.7V / 12.39 Wh

Item no.: 78__0G622C-A

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – CHARGING CRADLE

Charging cradle with USB-C input

Item no.: 78__0G622C-C

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – BELT CLIP / HOLSTER

For wearing on the belt

Item no.: 78__0G622C-H

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – USB CAR ADAPTER

USB car adapter / input DC 12 – 24 V / output DC 5 V / 2.1 A

Item no.: 78__0G622C-K

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – USB MAINS ADAPTER

USB mains adapter (AC/DC) / input 100 – 240 V ~ 50/60 Hz, 0.4 A / output DC 5 V / 2.1 A

Item no.: 78__0G622C-N

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – USB-C CHARGING CABLE

Cable length: 1 m

Item no.: 78__0G622C-U

SETO FLASHLIGHT FC LED RECHARGEABLE 2.0 – VELCRO ADHESIVE PAD

5 x 6 cm, each consisting of 1 x hook and loop

Item no.: 78__0G622C-V

For optimum utilisation of the luminaire, only the accessories supplied should be used.

© SETOLITE Lichttechnik GmbH

Alle Rechte, einschließlich Übersetzung behalten wir uns vor. Die vollständige oder teilweise Vervielfältigung ist nur mit schriftlicher Genehmigung des Herausgebers zulässig. Die Angaben in diesem Dokument entsprechen dem technischen Stand bei Drucklegung, Änderungen in Technik und Ausstattung, sowie Irrtümer und Druckfehler vorbehalten.

We reserve all rights, including translation. Reproduction in whole or in part is only permitted with the written consent of the publisher. The information in this document corresponds to the technical status at the time of going to press, changes in technology and equipment, as well as errors and misprints reserved.

www.setolite.com